



a/af*

2-1/2 GROOVED INLET x MNST;
2-1/2 x 3 GRV x MNST



b/bf*

2-1/2 NPT x MNST



c/cf*

1-1/2 NPT x MNST



d
dg (grooved inlet)


2-1/2 NPT x 3" MNST

DESCRIPTION:

Lansdale Angle Hose Valves feature all brass construction with cast bodies for rigidity and light weight. Rated to 300 lbs. These valves can be used with a Fire Hose Rack Assembly or as a Fire Department Connection outlet. Available with male/female outlet and most regional threads.

FEATURES:

- Sizes: 1-1/2", 2-1/2"
- Outlet Connection: Specify Regional Thread required
- Maximum Inlet Pressure: 300 PSI
- Inlet Connection: FNPT or Grooved

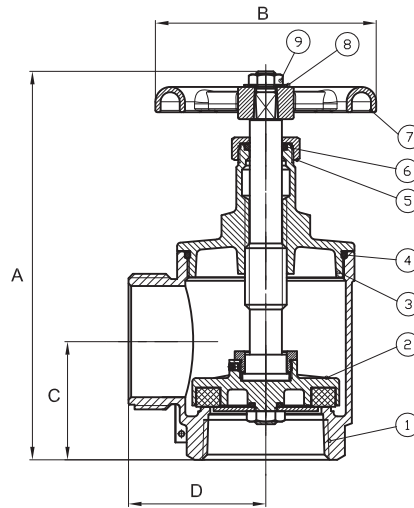

MATERIAL LIST		
NO.	DESCRIPTION	SPECIFICATION
1	Body	C37700
2	Spool Assembly	Sub Assembly (C37700)
3	Bottom	C37700
4	O-Ring	EPDM (A70)
5	Gland Nut	C37700
6	O-Ring	EPDM (A70)
7	Hand Wheel	304
8	Wheel Washer	ZL102
9	Wheel Nut	C37700


*female outlet

DIMENSIONS (in.) & WEIGHTS						
TYPE	A (OPEN)	A (CLOSED)	B	C	D	WEIGHT (lbs.)
a	11-1/2	9-7/8	5	3-5/8	3-1/2	9
af*	11-1/2	9-7/8	5	3-5/8	3-3/4	9
b	10-5/8	8-7/8	5	2-3/4	3-1/2	8
bf*	10-5/8	8-7/8	5	2-3/4	3-3/4	8
c	7-3/4	6-3/4	4	2	2-3/4	4
cf*	7-3/4	6-3/4	4-1/8	2	2-7/8	4
d	10-5/8	8-7/8	5	2-3/4	4-1/8	9.25
dg	11-1/2	9-7/8	5	3-5/8	4-1/8	9.25

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	

Flow Characteristic

MODEL LVLHV PRESSURE LOSS

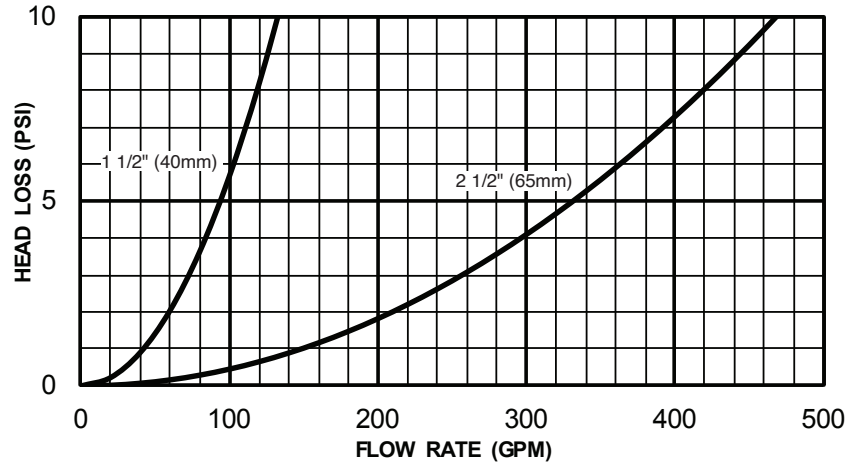

PROJECT		APPROVAL STAMP
PROJECT:		<input type="checkbox"/> APPROVED
ADDRESS:		<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:		<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:		REMARKS:
NOTES 1:		
NOTES 2:		