

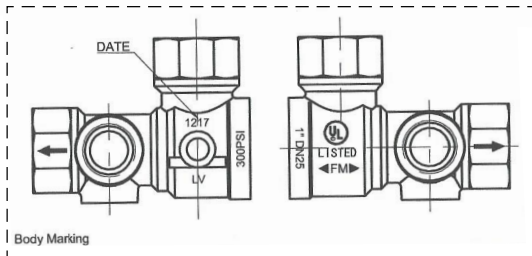


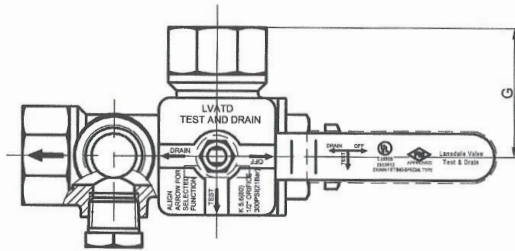

FEATURES:

- UL Listed and FM Approved
- Multi-function device allowing for system test (5.6K), system or floor drain, and "off" position
- Integrated sight glass
- Angle design for ease of installation in difficult locations
- Rated for 300 PSI
- Complies with all requirements of NFPA 13
- UL/FM Listed and Approved
- Test and drain with optional PRV, available nominal K-Factor: 2.8, 4.2, 5.6, 8.0, 11.2, 14.0 (available on 1-1/4" - 2" size units only), and 25.2 (available on 1-1/2" and 2" size units only)

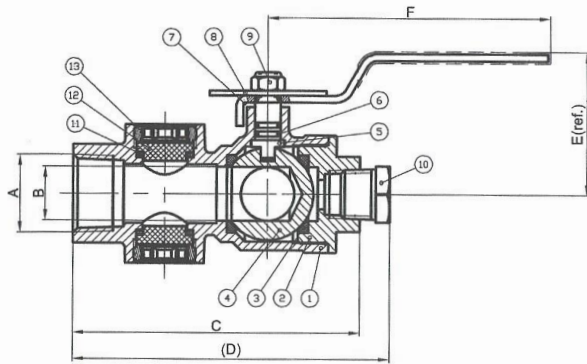

MATERIAL LIST		
NUMBER	DESCRIPTION	MATERIAL
1	Body	C37700
2	Cap	C37700
3	Seal	PTFE
4	Ball	C37700
5	Stem	C37700
6	O-Ring	NBR
7	Lever	Steel
8	Indicator Plate	Steel
9	Nut	Steel
10	Plug	C37700
11	Washer	NBR
12	Sight Glass	Lexan
13	Retaining Ring	C37700

(NPT)	B	C	D (REF)	E	F	G
3/4"	0.67	4.21	4.72	2.2	4.76	1.81
1"	0.91	4.82	5.31	2.4	4.76	2.17
1-1/4"	1.18	5.26	5.75	2.83	5.55	2.36
1-1/2"	1.5	5.28	5.67	3.22	6.34	2.56
2"	1.85	6.02	6.54	3.43	6.34	2.83

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	