


LANSDALE

VALVE & MANUFACTURING

1040 Broadway Westville, NJ 08093 / Phone: (800) 908-0523 / Fax: (856) 456-9223 / www.gemfiresprinkler.com

CONTINUOUS THREADED ROD


Size Range: 1/4" through 1 1/2" Stocked in six, ten, and twelve foot lengths. Other even foot lengths can be furnished to order. Material: Carbon steel or Stainless Steel Gr 304



Threads: National Coarse (USS), rod threaded complete length. Finish: q Plain or q Zinc Plated (Hot-Dip Galvanized optional) Maximum Temperature: Zinc Plated 450°F, Stainless Steel 650° F Approvals: Complies with MSS SP-58.

Ordering: Specify rod diameter and length, name and finish.

***Note:** The acceptability of galvanized coatings at temperatures above 450°F is at the discretion of the end user.

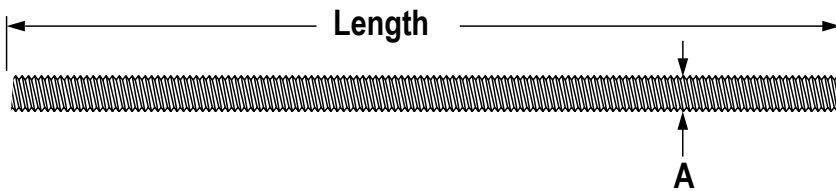

DIMENSIONS			
ROD SIZE (IN) A	THREADS PER INCH	MAX LOAD 650° F	WEIGHT PER FT
1/4	20	240	0.12
3/8	16	730	0.30
1/2	13	1,350	0.53
5/8	11	2,160	0.84
3/4	10	3,230	1.20
7/8	9	4,480	1.70
1	8	5,900	2.30
1 1/4	7	9,500	3.60
1 1/2	6	13,800	5.10

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	