

LANSDALE


VALVE & MANUFACTURING

www.lansdalevalve.com


	DIMENSION DATA						UNIT: IN
	A	B	C	D	E	F	G
2 1/2	4.13	3.80	5.31	2.87	5.31	5.04	
3	4.41	3.87	5.31	3.50	5.59	5.04	
4	5.71	4.54	5.31	4.50	6.90	5.04	
6	7.05	5.21	7.60	6.63	8.23	8.66	.27
8	8.03	5.80	7.60	8.63	9.21	8.66	.95
10	9.84	6.25	7.28	10.75	9.75	8.75	1.95

Features:

- Rated 300psi/ 20.7 BAR
- UL Listed/ FM Approved
- Indoor/ outdoor use
- 250° F max. temp.
- Pre-wired Double tamper switches
- Eliminates water hammer
- Slow open/ slow close
- Flag type position indicator
- DI body encapsulated with a resistant durable polymer coating to ensure a long service life
- Disc is EPDM Coated with SS Stem

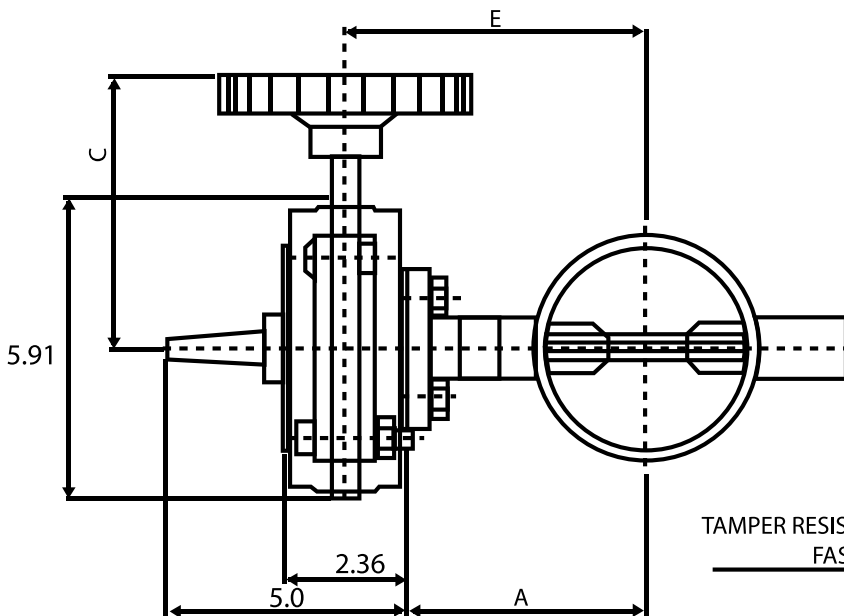

TAMPER RESISTANCE
FASTENER

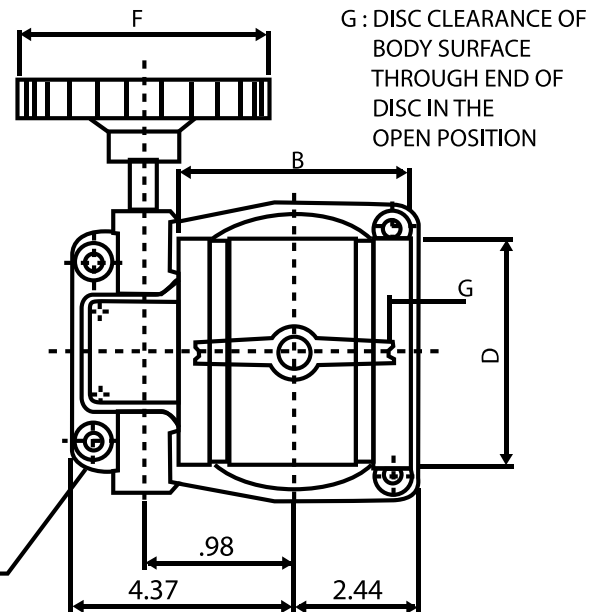

Manufactured for Lansdale International by Benison

PROJECT INFORMATION		APPROVAL STAMP	
Project:		<input type="checkbox"/> Approved	
Address:		<input type="checkbox"/> Approved as noted	
Contractor:		<input type="checkbox"/> Not approved	
Engineer:		Remarks:	
Submittal Data:			
Notes 1:			
Notes 2:			

LANSDALE INTERNATIONAL

1050 Broadway, Westville, NJ 08093
P. 800-908-0523 F. 856-456-9223
www.lansdaleinternational.com

Lansdale Grooved Butterfly Valve

SUPERVISORY TAMPER SWITCH CIRCUITS (VALVE FULLY OPEN)

