



GROOVED BUTTERFLY VALVE

MODEL BFV



FEATURES:

- Rated 300 psi/20.7 Bar
- Indoor/Outdoor use
- Prewired Double Tamper Switches/Normally Open
- Available Normally Closed
- Eliminates water hammer
- Slow open/slow close
- Flag type position indicator
- DI body encapsulated with a resistant durable polymer coating to ensure a long service life
- Disc is EPDM coated with SS stem

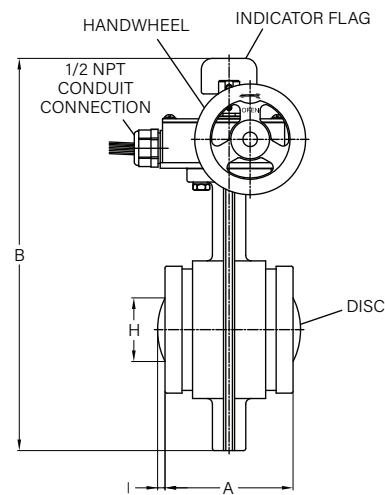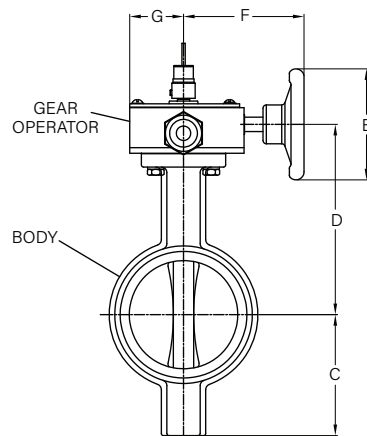

DIMENSIONAL DATA (IN)											
SIZE (IN)	PIPE OD	A	B	C	D	E	F	G	H	I	WT (LBS)
2	2.37	3.8	10.63	2.85	4.90	4.92	4.28	1.99	0	0	9.60
2½	2.88	3.8	11.72	3.35	5.5	4.92	4.28	1.99	0	0	11.24
3	3.5	3.8	12.22	3.58	5.76	4.92	4.28	1.99	0	0	12.51
4	4.5	4.54	13.92	4.29	6.75	4.92	4.28	1.99	0	0	15.65
5	5.56	5.83	16	5.16	7.93	5.91	5.79	2.32	0	0	26.4
6	6.63	5.83	17.07	5.71	8.44	5.91	5.79	2.32	0	0	28.66
8	8.63	5.24	19.67	6.69	9.29	8.86	8.19	2.76	5.66	1.24	47.18
10	10.75	6.26	22.46	7.68	11.1	8.86	8.19	2.91	7.21	1.65	73.41
12	12.75	6.5	25.39	9.5	12.2	8.86	8.19	2.91	9.96	2.7	89.29

PROJECT	APPROVAL STAMP
PROJECT:	☐ APPROVED
ADDRESS:	☐ APPROVED AS NOTED
ENGINEER:	☐ NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	