

# LANSDALE

## VALVE & MANUFACTURING

www.Breccocorp.com

# 350 PSI GROOVED-END SWING CHECK VALVE



- Installed in both Horizontal or Vertical Line with Upward Flow
- Easier and Faster to Maintain and Install
- Low Pressure Drop
- EPDM non-stick leak tight sealing
- All Stainless Steel Wetted Parts to Provide Superior Corrosion Resistance
- FM Approved & UL/ULC Listed

### Material Specifications

PART	SPECIFICATION
1. Body	Ductile Iron ASTM A 536
2. Seat	Bronze
3. Clapper	Stainless Steel 304
4. Facing Seal	EPDM Rubber
5. Clamping Ring	Stainless Steel 304
6. Gasket	EPDM Rubber
7. Spring	Stainless Steel 304
8. Hinge Pin	Stainless Steel 304
9. Bolt	Stainless Steel 304
10. Locknut	Stainless Steel 304
11. Plug 1/4" NPT	Carbon Steel
12. Plug 1/2" NPT	Carbon Steel

### Dimension

size	A	Weight
in.	in.	lbs
2	6.65	5.5
2 1/2	7.20	8.8
3	7.80	13
4	8.58	20
6	10.63	42
8	12.80	77

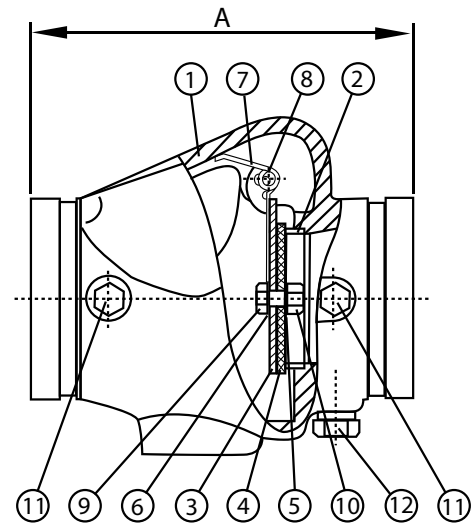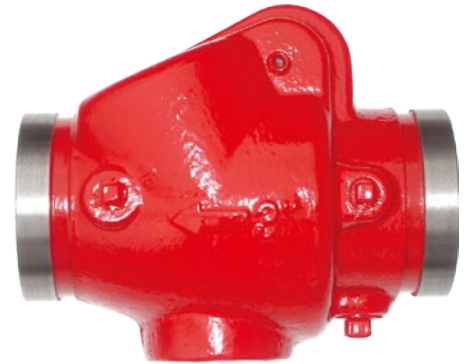

PROJECT INFORMATION		APPROVAL STAMP
Project:		<input type="checkbox"/> Approved
Address:		<input type="checkbox"/> Approved as noted
Contractor:		<input type="checkbox"/> Not approved
Engineer:		Remarks:
Submittal Data:		
Notes 1:		
Notes 2:		