

LANSDALE


VALVE & MANUFACTURING

350 PSI GROOVED-END SWING CHECK VALVE



Model Number: LVCVGG

- Installed in both Horizontal or Vertical Line with upward Flow
- Easier and faster to maintain and install
- Low pressure drop
- EPDM non-stick leak tight sealing
- All stainless steel wetted parts to provide superior corrosion resistance
- FM Approved/ UL/ULC Listed

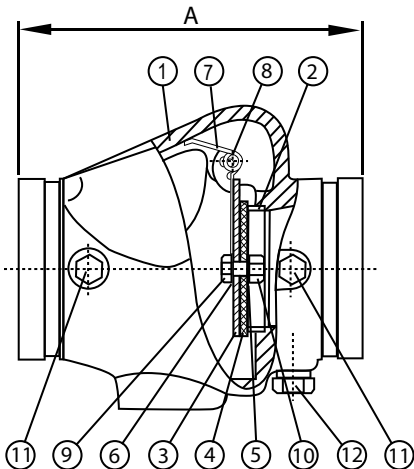

PART	SPECIFICATION
1. Body	Ductile Iron ASTM A 526
2. Seat	Bronze
3. Clapper	Stainless Steel 304
4. Facing Seal	EPDM Rubber
5. Clamping Ring	Stainless Steel 304
6. Gasket	EPDM Rubber
7. Spring	Stainless Steel 304
8. Hinge Pin	Stainless Steel 304
9. Bolt	Stainless Steel 304
10. Locknut	Stainless Steel 304
11. Plug 1/4" NPT	Carbon Steel
12. Plug 1/2" NPT	Carbon Steel

DIMENSIONS		
SIZE (IN)	A (IN)	WEIGHT (LB)
2"	6.65	5.5
2 1/2"	7.20	8.8
3"	7.80	13
4"	8.58	20
6"	10.63	42
8"	12.80	77

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	

Revision: 1/2019