


GROOVED BUTTERFLY VALVES



Size	Item #
2 1/2"	700-325-00160
3"	700-325-00180
4"	700-325-00200
6"	700-325-00240
8"	700-325-00260
10"	700-325-00265

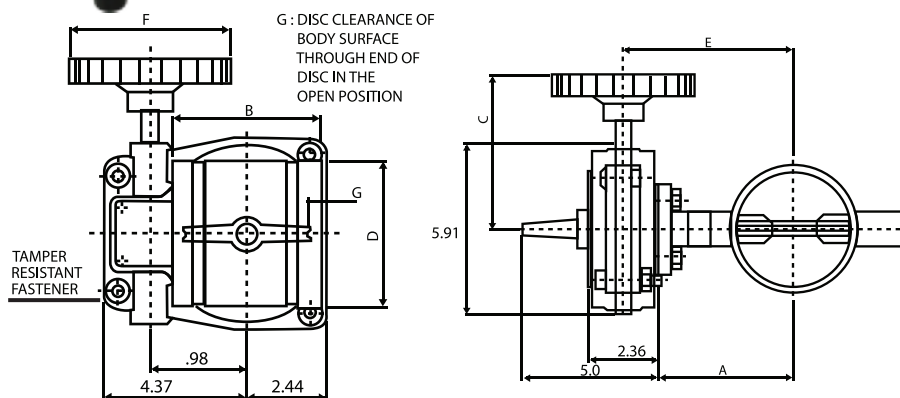

Material Specifications


Component	Material
Body	ASTM A-536 Nylon-11 Coated
Disc	ASTM A-536 EPDM Encapsulated
Upper & Lower Stems	AISI 420-SS
Worm Gear Shaft	AISI 410-SS
Housing	ASTM A-536
Hand Wheel	ASTM A-536
Flag Indicator	ASTM A-536
Shear Pin	ASTM A-510
Segment Gear	ASTM B-148 or B-584
Housing Gasket	EPDM Grade E
O-Rings (All)	EPDM Grade E

General Specifications:

- UL Listed/FM approved
- Indoor/Outdoor use
- Pressure rated for 300 PSI
- Flag type position indicator
- Pre-wired Double Tamper Switch
- Slow open/ close
- Ductile Iron body

Valve Dimensions (In.)							
Size	A	B	C	D	E	F	G
2 1/2"	4.13	3.80	5.31	2.87	5.31	5.04	
3"	4.41	3.87	5.31	3.50	5.59	5.04	
4"	5.71	4.54	5.31	4.50	6.90	5.04	
6"	7.05	5.21	7.60	6.63	8.23	8.66	.27
8"	8.03	5.80	7.60	8.63	9.21	8.66	.95
10"	9.84	6.25	7.28	10.75	9.75	8.75	1.95

Wiring Instructions:

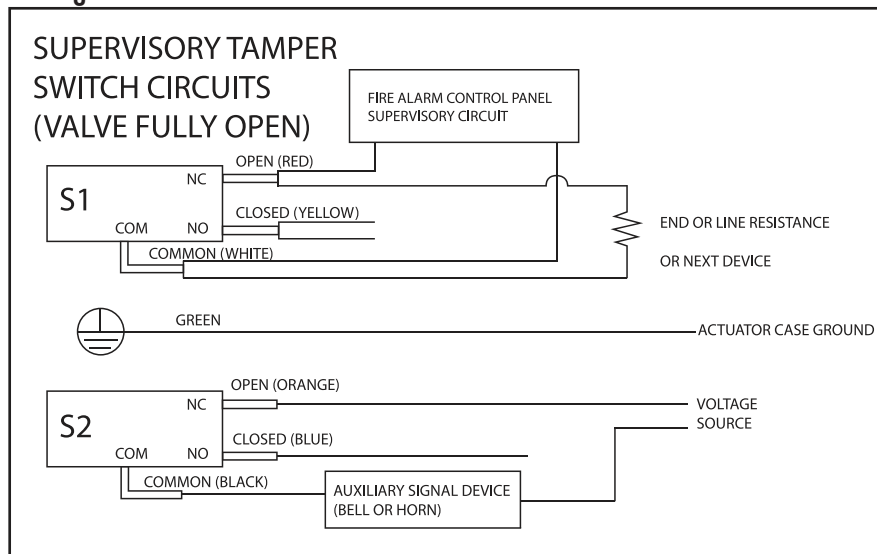

Flow Characteristics:

