

## POST INDICATOR VALVE W/ FLANGE ENDS




Size	Item #
3"	700-275-00360
4"	700-275-00365
6"	700-275-00370
8"	700-275-00375
10"	700-275-00380
12"	700-275-00385



### General Specifications:

- Valves comply with AWWA C515-15 Standard.
- Non-Rising Stem, Resilient Seated (EDPM encapsulated wedge)
- Triple O-Ring Seal.
- Available with Optional Test Plug on valve body (special order)
- Post Indicator Valves provided with universal "Indicator Post Plate".
- Mechanical Joint Ends to AWWA C153 / A21.53 Standard
- Flanged Ends to ANSI B16.1, Class 125
- UL Listed / FM Approved at 300 psi water working pressure rating.
- NSF-61 and NSF-372 Certified as Lead-Free for use in Drinking Water Systems
- Temperature Range: 42° - 180° F.
- Fusion Bonded Epoxy Coated Interior and Exterior to AWWA C550 Standard.
- Flanged Valves available with Hand Wheel or Operating Nut

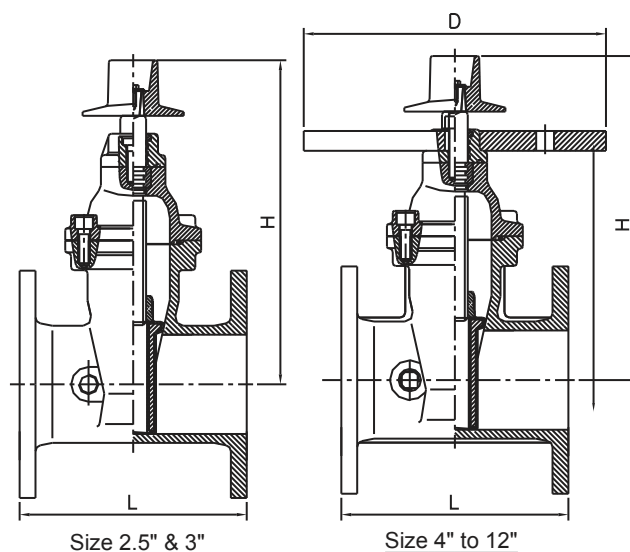

### Flanged

Dimensions (Inch)							
Size	3"	4"	5"	6"	8"	10"	12"
L	8	9	10	10½	11½	13	14
H	11⅝	13¾	16⅛	17⅕	21⅗	25⅜	28¾
D		12	12	12	12	12	12
Weight (Lbs)	41	64	79	103	161	235	339

Part Name	Material	ASTM Spec.
Body	Ductile Iron	A536 65-45-12
Wedge	Ductile Iron, EPDM Encapsulated	
Wedge Nut	Bronze	B62 C83600
Stem	Stainless Steel	AISI 304
Bonnet	Ductile Iron	A536 65-45-12
Gasket	Rubber	EPDM
Gland	Ductile Iron	A536 65-45-12
Thrust Collar	Bronze	B62 C83600
O-Ring	Rubber	EPDM
Post Flange	Ductile Iron	A536 65-45-12
Operating Nut	Ductile Iron	A536 65-45-12
NPT Plug	Bronze	Commercial
Post Flange	Bolt	Stainless Steel AISI 316
Bonnet Bolt	Stainless Steel	AISI 304