

LANSDALE

VALVE & MANUFACTURING

1040 Broadway Westville, NJ 08093 / Phone: (800)908-0523 / Fax: (856)456-9223 / www.gemfiresprinkler.com


THREADED ANGLE HOSE VALVE



Angle Hose Valves feature all brass construction with cast bodies for rigidity and light weight. Rated to 300 lbs. These valves can be used with a Fire Hose Rack Assembly or as a Fire Department Connection outlet.

Sizes Available:

- 1½" FNPT x MNST Hose Valve
- 1½" FNPT x FNST Hose Valve
- 2½" FNPT x MNST Hose Valve
- 2½" FNPT x FNST Hose Valve
- 2½" FNPT x MPHX Hose Valve
- 2½" FNPT x MTEMPE Hose Valve
- 2½" FNPT x MNYCC Hose Valve
- 2½" FNPT x MNYFD Hose Valve

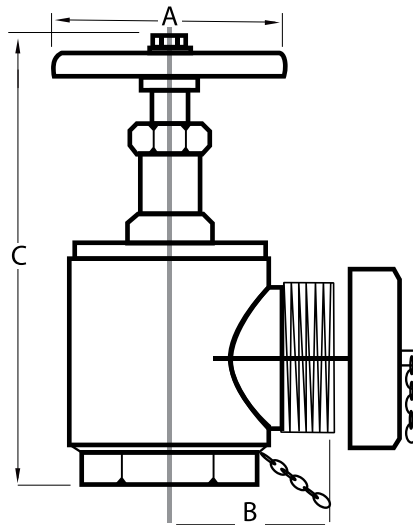

SPECIFICATIONS

1½" VALVE

A=4"
B=2¼"
C=8" (OPEN)
C=7" (CLOSED)
Weight: 4 lbs
Working Pressure: 300 lbs.

2½" VALVE

A=5"
B=3 3/16"
C=9¼" (CLOSED)
C=11" (OPEN)
Weight: 9 lbs
Working Pressure: 300 lbs.

PROJECT		APPROVAL STAMP
PROJECT:		<input type="checkbox"/> APPROVED
ADDRESS:		<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:		<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:		REMARKS:
NOTES 1:		
NOTES 2:		

Revision: 1/2019