

LANSDALE

VALVE & MANUFACTURING

www.lansdalevalve.com


[IE144TG]

4" 300lb Rated Threaded x Groove Check Valve



Dimensions:

4" 300lb Rated Male NPT threaded inlet x 4" Grooved outlet Check Valve. Used to prevent reverse water flow in Fire Protection Systems UL/ULC Approved

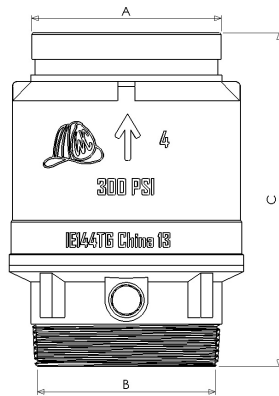

A= 4" (F) NPT

B= 4" GROOVED CONNECTION

C= 7.875" (200mm)

PROJECT INFORMATION		APPROVAL STAMP	
Project:		<input type="checkbox"/> Approved	
Address:		<input type="checkbox"/> Approved as noted	
Contractor:		<input type="checkbox"/> Not approved	
Engineer:		Remarks:	
Submittal Data:			
Notes 1:			
Notes 2:			

Brecco West • 77 N. 45th Avenue, Suite #1 • Phoenix, AZ 85043

Brecco East • 1040 Broadway • Westville, NJ 08093

Brecco South • 2463 Lloyd Road • Jacksonville, FL 32254

Ph: (800) 543-4194 • Fax: (602) 484-9248

www.breccocorp.com