


GROOVED FLANGE - STYLE 14



- Designed to connect ANSI Class 125 or 150 flanged components to a grooved piping system
- Made of a ductile iron conforming to ASTM A-536. Every lot is metallurgically examined to insure compliance
- Provided with EPDM rubber gasket as standard, suitable for -30 ° F to 150 ° F (-34 ° C to 110 ° C)
- Available with hot dipped galvanized coating

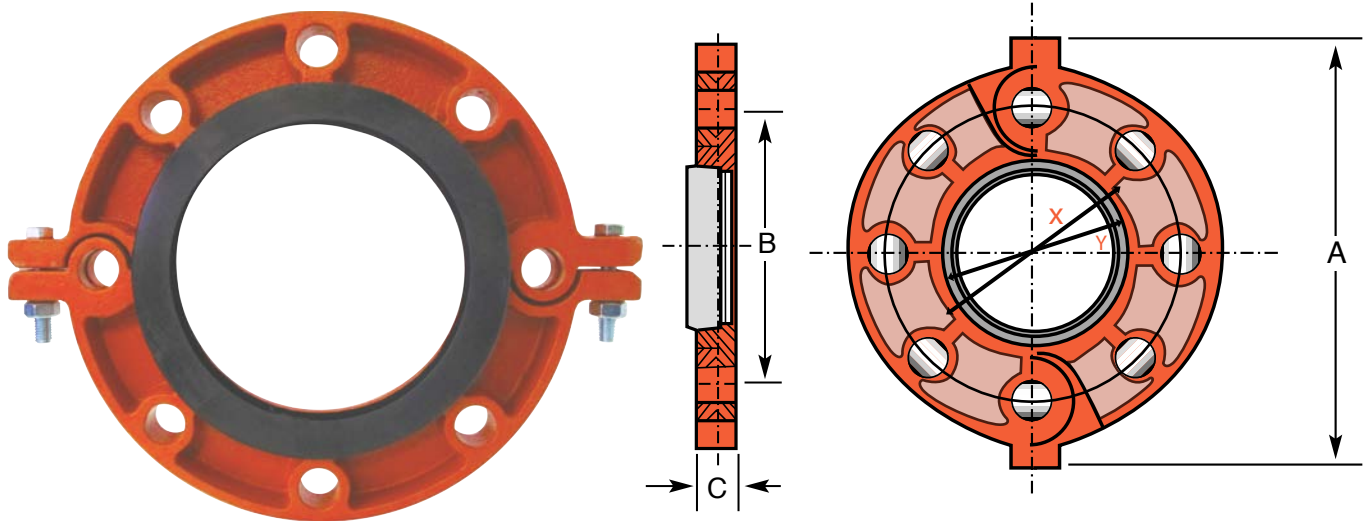

Pipe		Max Working Pressure (psi)*	Number and Bolt Size	Sealing Surface (In.)		Dimensions (In.)			Approx. Wt. Each (lb.)
Nominal Size	Actual Size (In.)			X Min.	Y Max.	A	B	C	
						ANSI	ANSI		
2"	2.375	300	4½ x 2½	3.09	2.42	8.110	4.763	0.866	3.0
2½"	2.875	300	4½ x 3	3.58	2.92	9.055	5.511	0.866	4.2
3"	3.500	300	4½ x 3	4.21	3.56	9.527	5.984	0.944	4.4
4"	4.500	300	8½ x 3	5.26	4.57	11.023	7.519	0.944	8.4
5"	5.563	300	8¾ x 3½	6.41	5.65	12.795	8.503	0.964	9.0
6"	6.625	300	8¾ x 3½	7.48	6.71	13.188	9.500	0.866	10.4
8"	8.625	300	8¾ x 3½	9.58	8.70	16.311	11.751	1.181	19.8
10"	10.75	300	12½ x 3½	11.91	11.18	19.50	14.375	1.181	23.4

UL Listed Under File No. EX15592

