



REDUCER TEE - SHORT PATTERN - STYLE 115




- All fittings are full flow design
- Made of durable, high-strength ductile iron conforming to ASTM A536; every lot is metallurgically tested for compliance
- Available with hot dipped galvanized coating

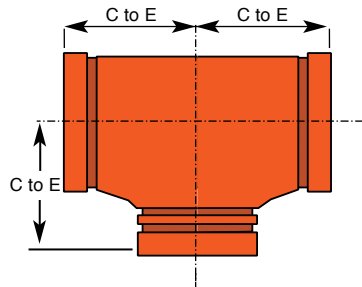

Style 115



Style 115TM

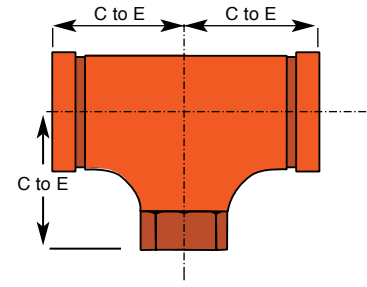

Style 115TF

FLOW DATA Frictional Resistance (Expressed as equivalent Straight Pipe in Ft.)					
Nominal Size (In.)	Reducer Tee		Nominal Size (In.)	Reducer Tee	
	Branch	Run		Branch	Run
1¼	5.8	2.3	5	21.0	8.4
1½	6.7	2.7	6	25.3	10.1
2	8.6	3.4	8	33.3	13.3
2½	10.3	4.1	10	41.8	16.7
3	12.8	5.1			
4	16.8	6.7			

Flow data is based upon the pressure drop of Sch. 40 pipe.

UL Listed Under File No. EX15591



Reducer Tee - No.115 Add after part number the letters TF for internal or TM for external threaded outlet					
Nominal Size (In.)	C to E (In.)	Approx. Wgt. Ea. (lb.)	Nominal Size (In.)	C to E (In.)	Approx. Wgt. Ea. (lb.)
2 x 2 x 1¼	2.76	2.7	6 x 6 x 5	5.60	30.9
2 x 2 x 1½	2.76	2.7	6 ½ x 6 ½ x 2	5.60	26.4
2½ x 2½ x 1	3.00	4.8	6 ½ x 6 ½ x 2½	5.60	26.5
2½ x 2½ x 1¼	3.00	4.8	6 ½ x 6 ½ x 3	5.60	24.0
2½ x 2½ x 1½	3.00	5.1	6 ½ x 6 ½ x 4	5.60	25.0
2½ x 2½ x 2	3.00	5.1	8 x 8 x 1½	7.05	33.0
3 x 3 x 1	3.38	5.8	8 x 8 x 2	7.05	33.5
3 x 3 x 1¼	3.38	6.4	8 x 8 x 2½	7.05	39.0
3 x 3 x 1½	3.38	7.5	8 x 8 x 3	7.05	33.6
3 x 3 x 2	3.38	8.4	8 x 8 x 4	7.05	47.4
3 x 3 x 2½	3.38	8.6	8 x 8 x 5	7.05	48.3
4 x 4 x 1	4.00	7.8	8 x 8 x 6	7.05	49.8
4 x 4 x 1¼	4.00	9.6	8 x 8 x 6½	7.05	50.5
4 x 4 x 1½	4.00	10.2	10 x 10 x 2	8.46	84.9
4 x 4 x 2	4.00	10.4	10 x 10 x 2½	8.46	83.8
4 x 4 x 2½	4.00	11.4	10 x 10 x 3	8.46	82.7
4 x 4 x 3	4.00	11.6	10 x 10 x 4	8.46	79.4
5 x 5 x 1½	4.80	14.3	10 x 10 x 5	8.46	78.9
5 x 5 x 2	4.80	14.5	10 x 10 x 6	8.46	78.3
5 x 5 x 2½	4.80	15.2	10 x 10 x 8	8.46	77.2
5 x 5 x 3	4.80	15.4			
5 x 5 x 4	4.80	16.1			
6 x 6 x 1½	5.60	24.0			
6 x 6 x 2	5.60	26.4			
6 x 6 x 2½	5.60	26.5			
6 x 6 x 3	5.60	26.5			
6 x 6 x 4	5.60	29.3			

Style 115TM and 115TF are available up to 8" run size and 2½" outlet size. Max working pressure of Threaded Tee is 300 psi.