


TEE LOCK

- STYLE 13



- Molded gasket for each header size is made to last and insure a leak tight connection
- Wrap around casting is combined with a high tensile U-bolt flattened to prevent pipe deformation
- Rated for 300 psi. UL Listed and FM Approved
- Manufactured from Ductile Iron, per ASTM A536
- Grade E EPDM gasket rated for -30°F to 150°F*

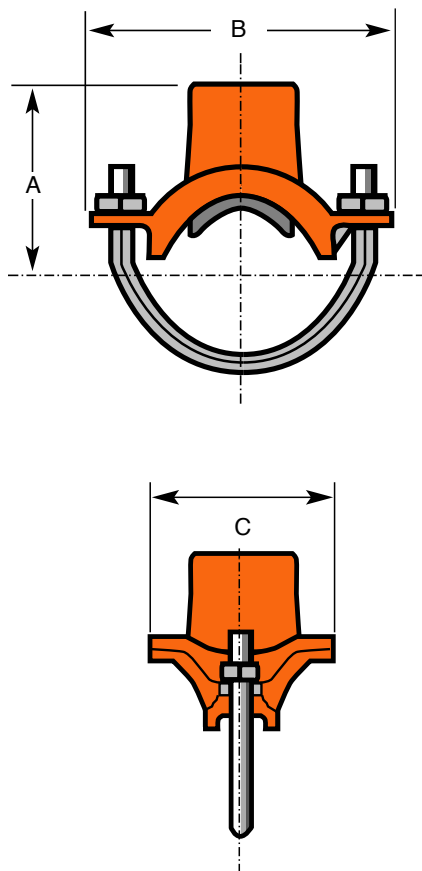

Nominal Size Inch	Max. Work Press. psi	Hole Saw inch	Dimensions inches		
			A	B	C
1 ¼ x ½	300	1 ³ / ₁₆	1.693	3.543	2.205
1 ¼ x ¾	300	1 ³ / ₁₆	1.772	3.543	2.205
1 ¼ x 1	300	1 ³ / ₁₆	1.969	3.543	2.20
1 ½ x ½	300	1 ³ / ₁₆	1.693	3.661	2.323
1 ½ x ¾	300	1 ³ / ₁₆	2.126	3.661	2.323
1 ½ x 1	300	1 ³ / ₁₆	2.283	3.661	2.323
2 x ½	300	1 ³ / ₁₆	2.126	3.780	2.323
2 x ¾	300	1 ³ / ₁₆	2.205	3.780	2.323
2 x 1	300	1 ³ / ₁₆	2.598	3.780	2.323
2 ½ x ½	300	1 ³ / ₁₆	2.362	4.331	2.323
2 ½ x ¾	300	1 ³ / ₁₆	2.480	4.331	2.323
2 ½ x 1	300	1 ³ / ₁₆	2.756	4.331	2.323
3 x ½	300	1 ³ / ₁₆	2.402	4.331	2.323
3 x ¾	300	1 ³ / ₁₆	2.638	4.331	2.323
3 x 1	300	1 ³ / ₁₆	2.913	4.331	2.323

*Tee Lock gaskets should not be lubricated.



UL Listed Under File No. EX15591