


CONTINUOUS THREADED ROD HANGERS & FASTENERS MODEL LVATR



Product Overview

Lansdale's, "All Threaded Rod" is a fully threaded carbon steel rod with standard right hand UNC machine running thread. It can be ordered in pre-cut six, ten and twelve ft lengths and then cut to size in the field to meet whatever hanger lengths are required. Custom lengths are available on request.

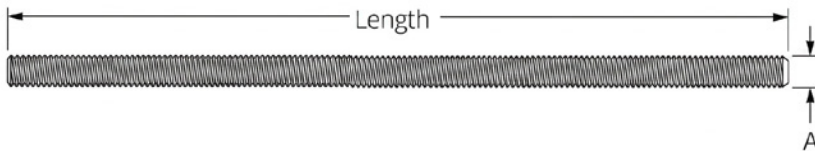

Material Specifications

Size Range

1/4" through 1-1/2". Stocked in six, ten, and twelve foot lengths. Other even foot lengths can be furnished to order.

Material

Carbon steel. Available black, zinc-plated.

Threads

National Coarse (UNC)

Maximum Temperature

650° F

Compliance

MSS SP-58; ASTM A307Gr A

Ordering

Specify rod diameter, length, and finish.

CONTINUOUS THREADED ROD, MODEL LVATR			
Rod Size (in.) A	Threads per (in.)	Max Load 650°F	Weight per ft. (lbs.)
1/4	20	240	0.12
3/8	16	730	0.30
1/2	13	1,350	0.53
5/8	11	2,160	0.84
3/4	10	3,230	1.20
7/8	9	4,480	1.70
1	8	5,900	2.30
1-1/4	7	9,500	3.60
1-1/2	6	13,800	5.10

For more information

Learn more about Lansdale Valve's LVATR
and other products available by visiting
www.lansdalevalve.com

Lansdale Valve & Manufacturing

1040 Broadway
Westville, New Jersey 08093



PROJECT INFORMATION		APPROVAL STAMP
Project:		☐ Approved
Address:		☐ Approved as noted
Contractor:		☐ Not approved
Engineer:		Remarks:
Submittal Date:		
Notes 1:		
Notes 2:		