

LANSDALE

VALVE & MANUFACTURING

1040 Broadway Westville, NJ 08093 / Phone: (800)908-0523 / Fax: (856)456-9223 / www.gemfiresprinkler.com

CPVC 1-HOLE STRAP



Model Number:

3/4" 500-300-00220 1" 500-300-00240 1 1/4" 500-300-00260
1 1/2" 500-300-00280 2" 500-300-00300


Provides support for CPVC or Polybutylene fire sprinkler piping fire sprinkler systems installed per NFPA 13, 13R and 13D.

- Pre-galvanized finish

Installation and configuration shall conform to the requirements of the NFPA 13, instructions and applicable local codes. Install with hanger tabs upward only. Do not install on the bottom of a beam or under horizontal surface

INSTALLATION:

1. Place pvc pipe into hanger
2. Mount hanger into wood beam with screws

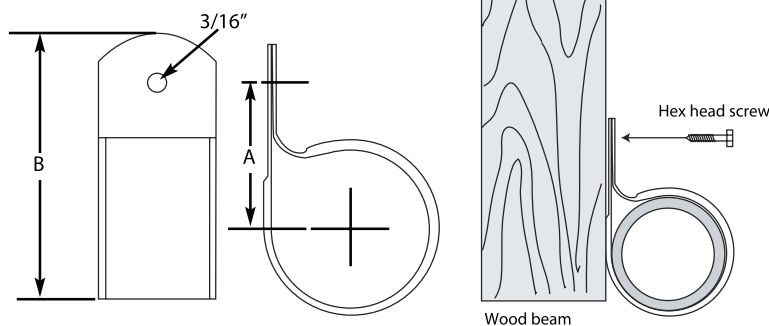

1. Place PVC pipe into hanger.
2. Mount hanger into wood beam with screws provided

CROSS REFERENCE

Size	A	B	MAX HANGER SPACING	TOLCO®	ERICO®
3/4"	1"	2 7/16"	5 1/2"	12722	1070075
1"	1 7/16"	2 11/16"	6"	12746	1070100
1 1/4"	1 5/8"	3 1/16"	6 1/2"	12753	1070125
1 1/2"	1 3/4"	3 5/16"	7"	12760	1070150
2"	1 11/16"	3 3/4"	8"	12777	1070200

PROJECT	APPROVAL STAMP
PROJECT:	<input type="checkbox"/> APPROVED
ADDRESS:	<input type="checkbox"/> APPROVED AS NOTED
ENGINEER:	<input type="checkbox"/> NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	

Revision: 1/2019