



TEE LOCK STYLE 13

- Molded gasket for each header size is made to insure a leak tight connection
- Rated for 300 psi. UL Listed and FM Approved
- Manufactured from Ductile Iron, per ASTM A536
- Grade E EPDM gasket rated for -30°F to 150°F*
- Available with hot dipped galvanized coating



UL Listed Under Designation: EX15592

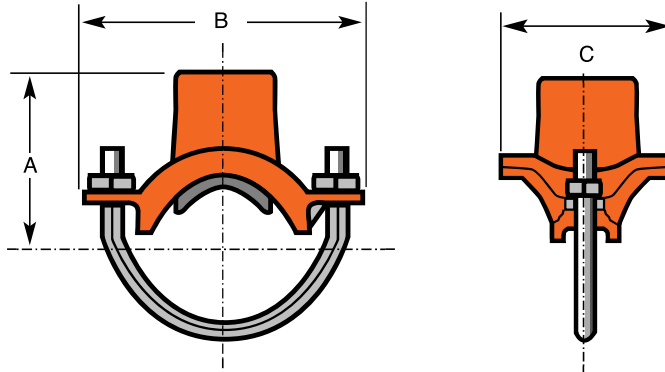

Nominal Size (In.)	Max. Working Pressure (psi)	Hole Saw Inch	Dimensions Inches			Weight
			A	B	C	
1¼ x ½	300	1⅜	1.693	3.543	2.205	0.78
1¼ x ¾	300	1⅜	1.772	3.543	2.205	0.85
1¼ x 1	300	1⅜	1.969	3.543	2.20	0.95
1½ x ½	300	1⅜	1.693	3.661	2.323	0.78
1½ x ¾	300	1⅜	2.126	3.661	2.323	0.89
1½ x 1	300	1⅜	2.283	3.661	2.323	0.98
2 x ½	300	1⅜	2.126	3.780	2.323	0.82
2 x ¾	300	1⅜	2.205	3.780	2.323	0.90
2 x 1	300	1⅜	2.598	3.780	2.323	1.02
2½ x ½	300	1⅜	2.362	4.331	2.323	0.90
2½ x ¾	300	1⅜	2.480	4.331	2.323	0.93
2½ x 1	300	1⅜	2.756	4.331	2.323	0.95

PROJECT	APPROVAL STAMP
PROJECT:	☐ APPROVED
ADDRESS:	☐ APPROVED AS NOTED
ENGINEER:	☐ NOT APPROVED
SUBMITTAL DATA:	REMARKS:
NOTES 1:	
NOTES 2:	